


DATE	REV.	DESCRIPTION	NAME
13.10.2014	01	On the connector housing must be changed the silk print and the ATEX logo. On the label of the plastic bag must be changed the silk print and the ATEX logo. See the drawing	LORENZO CIMMINO
20.07.2017	02	On the connector housing is changed the silk print and the ATEX logo. On the label of the plastic bag is changed the silk print and the ATEX logo. Is changed the new operating instruction. See the drawing	ROBERTO SUGLIANI
07.08.2018	03	On the ATEX label and on the operating instructions must be added MADE IN CHINA.	ROBERTO SUGLIANI

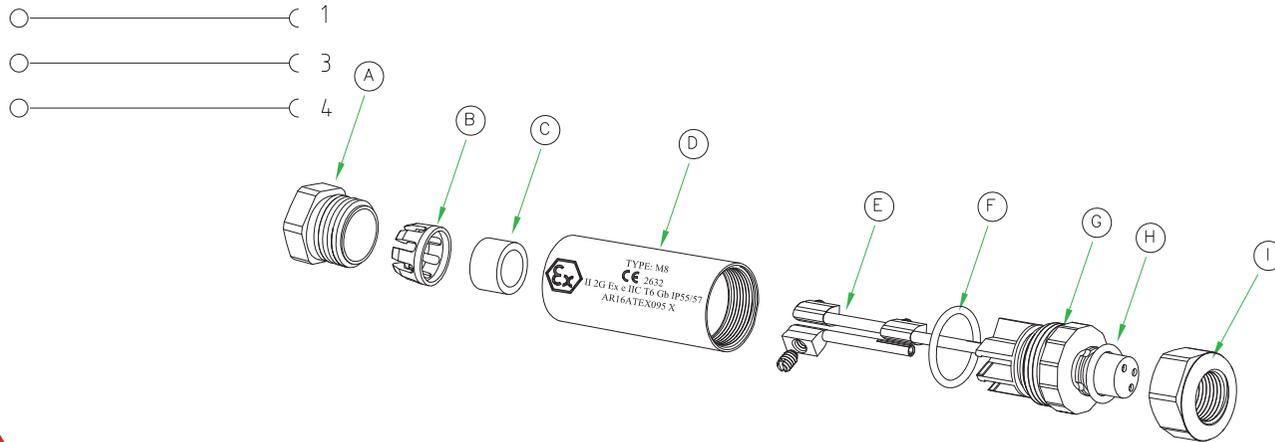

CONNECTOR FEATURES	
PRODUCT TYPE	M8 FIELD ATTACHABLE
CONTACT TYPE	SCREW FEMALE
NUMBER OF CONTACTS	3POLES
HOUSING MATERIAL	PA66 -CM3004V0
HOUSING TYPE	180°
HOUSING COLOUR	BLACK
RATED VOLTAGE	60V AC/DC
RATED CURRENT	4A
COUPLING NUT MATERIAL	Brass+nickel plated (CuZnNi)
O'RING	NBR
CONNECTOR WITH H.T.P.LOGO	

! THIS CODE IS SPECIAL BECAUSE IS THE ATEX CONNECTORS MAIN REFERENCE NORM:ATEX 2014/34/EU MATERIAL PA66 - CM3004V0 (Material:V0 UL/CSA), FOR ALL COMPONENT OF THE CONNECTOR

! PACKAGING:
SINGLY PACKED IN THE PLASTIC BAG
IN THE PLASTIC BAG MUST BE INSERTED THE
NEW OPERATING INSTRUCTION FOR CIRCULAR CONNECTORS.

PLASTIC BAG

YEAR
2016
2017
2018
2019
ETC.

H.T.P. S.r.l.
I-24030 - BREMBATE DI SOPRA(BG)
CODE: 08FC3000-S-ATEX YEAR:####
TYPE: M8
5#####

MADE IN CHINA



H.T.P.PRODUCTION CODE

REV.03

WHITE LABEL

CE 2632 Ex II 2G Ex e IIC T6 Gb IP55/57 AR16ATEX095 X

PAY ATTENTION: REV. 02

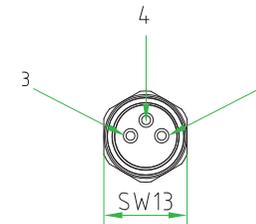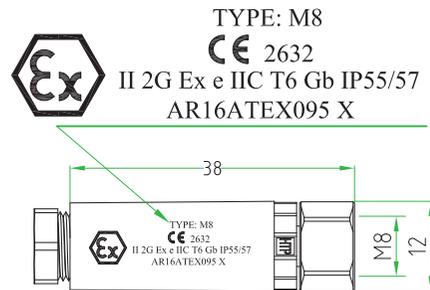

A	PRESS CABLE SREW
B	LAMELLAE PRESS-CABLE SEAL
C	GASKET PRESS-CABLE SEAL
D	HOUSING BLACK
E	SCREW CONTACT GOLD PLATED
F	O-RING
G	INTERNAL CORE M8
H	O-RING
I	M8 NUT Brass+nickel plated (CuZnNi)

TOLLERANZE	± 0.2	DISEGNATORE LORENZO CIMMINO	DATA	13.10.14	SCALA	1:1	DISEGNO N.	1/2
U.d.M	ANGOLO	CONTROLLATO						
DESCRIZIONE	M8 FEMALE STRAIGHT 180°, 3 POLES, WITH H.T.P.LOGO, BLACK HOUSING, FIELD ATTACHABLE WITH SCREW CONTACT. CONNECTOR MAIN REFERENCE NORM:ATEX 2014/34/EU				TIPO	M8		MATERIALE
					CODICE		08FC3000-S-ATEX	