
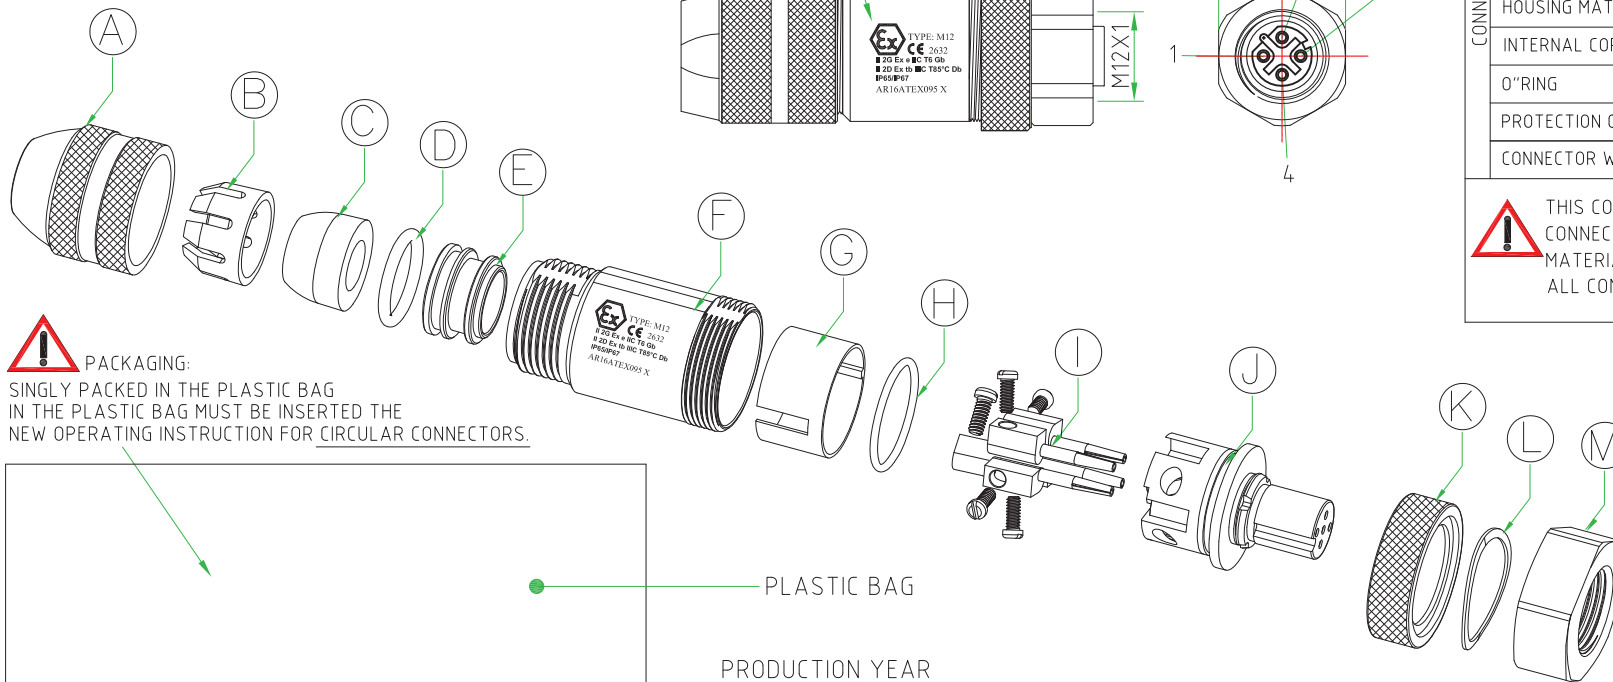


- ———— (1
- ———— (2
- ———— (3
- ———— (4

PAY ATTENTION:

SILK SCREEN PRINT THE LOGO ATEX

Ex TYPE: M12
CE 2632
 II 2G Ex e IIC T6 Gb
 II 2D Ex tb IIIC T85°C Db
 IP65/IP67
 AR16ATEX095 X

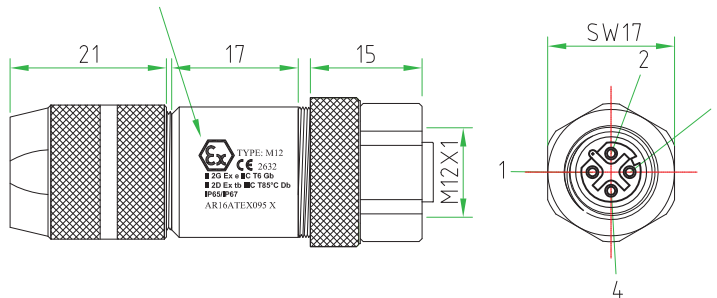

! PACKAGING:
 SINGLY PACKED IN THE PLASTIC BAG
 IN THE PLASTIC BAG MUST BE INSERTED THE
 NEW OPERATING INSTRUCTION FOR CIRCULAR CONNECTORS.

PRODUCT TYPE	M12 D-CODED FIELD ATTACHABLE
CONTACT TYPE	FEMALE
NUMBER OF CONTACTS	4POLES
HOUSING TYPE	180°
RATED VOLTAGE	250V AC/DC
RATED CURRENT	4A
COUPLING NUT MATERIAL	Brass+nickel plated (CuZnNi)
HOUSING MATERIAL	Brass+nickel plated (CuZnNi)
INTERNAL CORE MATERIAL	PA66 - CM3004 V0
O-RING	NBR
PROTECTION CLASS	IP5/IP67
CONNECTOR WITH H.T.P.LOGO	

! THIS CODE IS SPECIAL BECAUSE IS THE ATEX CONNECTORS MAIN REFERENCE NORM:ATEX2014/34/EU MATERIAL PA66 - CM3004 V0 (MaTerial:V0 UL/CSA), FOR ALL COMPONENT OF THE CONNECTOR

A	PRESS CABLE SREW
B	LAMELLAE PRESS-CABLE SEAL
C	GASKET PRESS-CABLE SEAL
D	O-RING
E	METAL HOLDER TO FIX THE SHIELD
F	HOUSING BRASS NICKEL PLATED
G	PLASTIC PROTECTION
H	O-RING
I	SCREW CONTACT GOLD PLATED
J	INTERNAL CORE M12 A-CODED
K	NUT FOR HOUSING BRASS NICKEL PLATED
L	METAL O-RING
M	M12 NUT BRASS NICKEL PLATED

PLASTIC BAG

PRODUCTION YEAR
 EXAMPLE: 2016
 2017
 2018...

H.T.P. S.r.l.
 I-24030 - BREMBATE DI SOPRA(BG)
 CODE: D-12F14000-ATEX YEAR:20##
 M12 METAL HOUSING
 5#####

H.T.P.PRODUCTION CODE

WHITE LABEL

CE 2632 **Ex** II 2G Ex e IIC T6 Gb
 II 2D Ex tb IIIC T85°C Db IP65/67
 AR16ATEX095 X

TOLLERANZE	±0.2	DISEGNATORE	ROBERTO SUGLIANI	DATA	20-04.2017	SCALA	1:1	DISEGNO	1/2
U.d.M	ANGOLO	CONTROLLATO							
DESCRIZIONE	M12 FEMALE STRAIGHT 180°,4POLES, FIELD ATTACHABLE METAL HOUSING CONNECTOR MAIN REFERENCE NORM ATEX2014/34/EU				TIPO	M12		MATERIALE	
					H.T.P. HIGH TECH PRODUCTS		CODICE D-12F14000-ATEX		